


2000 Bloomingdale Rd  
Units 245-250  
Glendale Heights, IL 60139

Tel: 630-893-1720  
FAX: 630-893-9991  
Web: [www.omnivisionusa.com](http://www.omnivisionusa.com)  
Email: [info@omnivisionusa.com](mailto:info@omnivisionusa.com)

**19"**  
**Industrial Chassis**  
**TFT Color LCD**  
**VGA Monitor**

**GT19D4-xx series**

xx = numeric for options selected

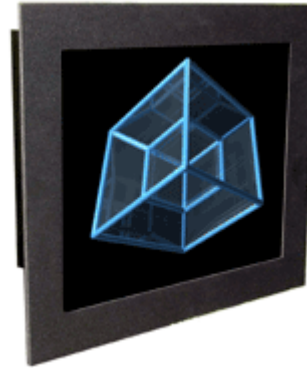

Shown with black bezel. Stainless Steel and additional color Bezels also available.

This state of the art microprocessor-controlled color TFT active matrix LCD monitor accepts standard computer interface VGA/SVGA/XGA signals. It automatically expands lower resolution VGA, SVGA, and XGA formats to full screen SXGA resolution of 1280 x 1024. This model fully conforms to EPA Energy Star and VESA DPMS (Display Power Management Signaling) power management standards.

**Display Specification:**

- Active Matrix - 19" TFT color LCD
- Viewing Size - 14.8" X 11.8"
- Viewing Angle - Horizontal 140 degrees  
Vertical 140 degrees
- Max Resolution -1280 x 1024 pixels
- Pixel Pitch – 0.297 x 0.297 mm
- Display Color - 16.7 M (dithering) colors
- Brightness - Full white 250 cd/m sq'd (NITS)
- Contrast Ratio -Typically 500:1

**General Specification:**

- Light weight industrial black metal chassis.
- Temperature - Operating from 0 to +40 degrees C, Storage from -25 to +60 degrees C
- Input connector - High density 15-pin D@ sub connector
- Input signal - Standard VGA, SVGA, XGA, or SXGA signal
- On Screen Display for user control of Contrast, Brightness, Vertical/Horizontal Position, Color Auto Adjust, Volume. Standard user service buttons on rear panel for Menu, Up, Down, Increase (+), and Decrease (-).
- Optional - front panel mounted user service controls.
- Power input: Auto ranging 110-264 VAC
- Power consumption - Less than 65 watts
- Agency Compliance – UL, TUV, MPR-II, FCC-B and CE
- Protective panel options include - polycarbonate material or tempered glass
- NEMA 4 or NEMA 12 standard with tempered glass models GT19D4-12 and GT19D4-22
- NEMA 4 or NEMA 12 available with 5-wire resistive touch screen models
- Touch screen offered - 5-wire resistive
- Touch screen interface available to serial RS232 port or USB port for most operating systems



## Display Monitor Specialists

---

2000 Bloomingdale Rd  
Units 245-250  
Glendale Heights, IL 60139

Tel: 630-893-1720  
FAX: 630-893-9991  
Web: [www.omnivisionusa.com](http://www.omnivisionusa.com)  
Email: [info@omnivisionusa.com](mailto:info@omnivisionusa.com)

### **GT 19" Series - 19" TFT color LCD (1280x1024), SXGA, 110-264 VAC industrial chassis**

- GT19D4-11 Black Bezel, protective panel
- GT19D4-21 Stainless Steel Bezel, protective panel
- GT19D4-12 Black Bezel, tempered glass, NEMA 4 rated
- GT19D4-22 Stainless Steel Bezel, tempered glass, NEMA 4 rated
- GT19D4-13 Black Bezel, resistive touch screen
- GT19D4-23 Stainless Steel Bezel, resistive touch screen