

# Omni Vision Inc

504 Congress Circle N  
Unit B  
Roselle, IL 60172

## Display Monitor Specialist

Tel: 630-893-1720  
FAX: 630-893-9991  
Web: www.omnivisionusa.com  
Email: info@omnivisionusa.com

### Industrial TFT Color LCD Display Monitors


10.4" kit version models

### MN10B1G1-AP7

### Replacement monitors used in HURCO DUAL HEAD CONTROLLER

**Made in the USA**

Signal: TTL	Model number	Power
DC Version- open frame	MN10B1G1-AP7	+12VDC

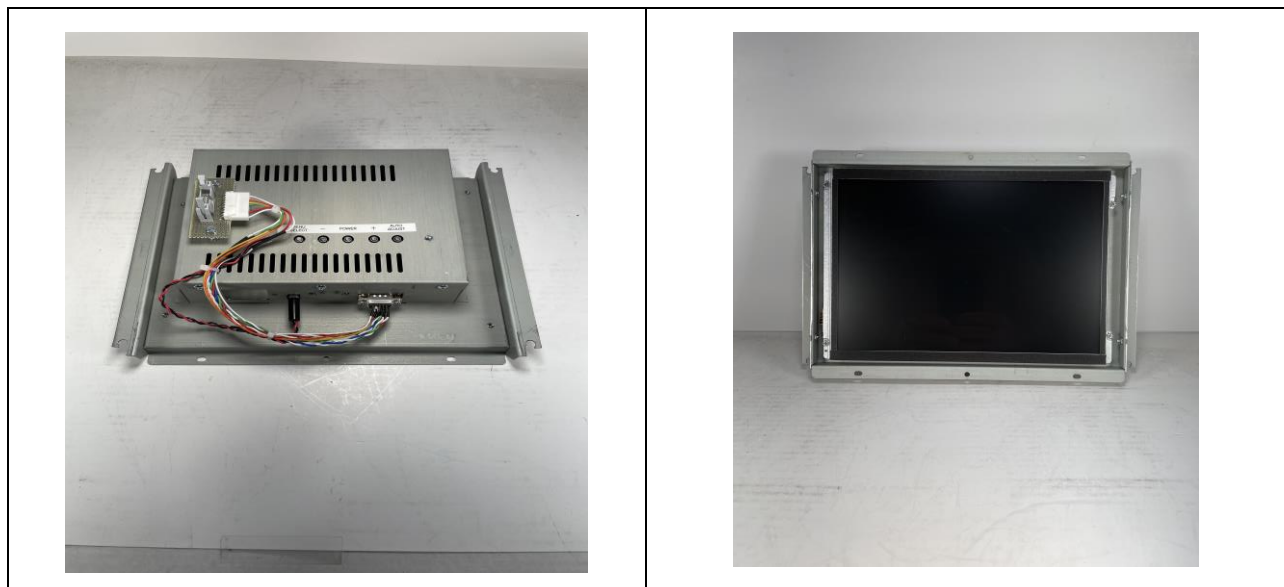

## FEATURES

- Easy to mount open frame, metal chassis (top & bottom flanges or side flanges)
- User service controls of brightness, contrast, auto set up, etc
- User service controls accessed in rear
- input signals-TTL
- Input power flexibility-standard +12 vdc at 1.0 Amps, other DC voltages
- **RoHS compliant**
- Safety agency compliance - UL, cUL, and others
- Standard model has anti-reflective polycarbonate protective panel that prevents damage to LCD face

# ***Omni Vision Inc***

**504 Congress Circle N**

**Unit B**

**Roselle, IL 60172**

## **Display Monitor Specialist**

Tel: 630-893-1720

FAX: 630-893-9991

Web: [www.omnivisionusa.com](http://www.omnivisionusa.com)

Email: [info@omnivisionusa.com](mailto:info@omnivisionusa.com)

### **ELECTRICAL & DISPLAY SPECIFICATIONS**

<b>Active Matrix</b>	10.4" TFT color LCD (264.1 mm diagonal)
<b>Usable Viewing Area (Size)</b>	8.31" x 6.29" (211.2 x 158.4 mm)
<b>Viewing Angle</b>	Horizontal – right & left 60 degrees Vertical - upper 35 degrees & lower 65 degrees
<b>Dot Pitch</b>	0.264 x 0.264 mm
<b>Max Resolution</b>	800 x 600
<b>Max Colors</b>	262K colors (262K-RGB 6-bit driver)
<b>Response Time</b>	Rise time – 10 milliseconds (typical) Fall time – 25 milliseconds (typical)
<b>Horizontal Frequency</b>	VGA mode 31.5 to 48 kHz at 60 Hz
<b>Vertical Frequency</b>	56 to 85 Hz
<b>Brightness (full white)</b>	230 nits
<b>Contrast Ratio</b>	500:1
<b>Input Signal</b>	
<b>TTL</b>	15.72 kHz @ 60 Hz Through 10 pin dual in line locking header
<b>Power input</b>	Standard +12vdc @ 1 Amps
DC voltage input	Through 10 pin dual in line locking header
<b>Temperature</b>	
Operating	-30 to +80 degrees C
Storage	-30 to +80 degrees C